

SERVICE BULLETIN

00- T6. 09

DATE: 21/02/00


MODELS CONCERNED: All C'series tractors

CONCERN: Bolt on 20" Rear Wheels

AFTER SERIAL NUMBERS: 000201.....

## Product Improvement

After serial number 000201..... all C'series tractors are now produced with 20" rear wheels & tyres. The wheels and tyres are now bolted to the transaxle using hubs.

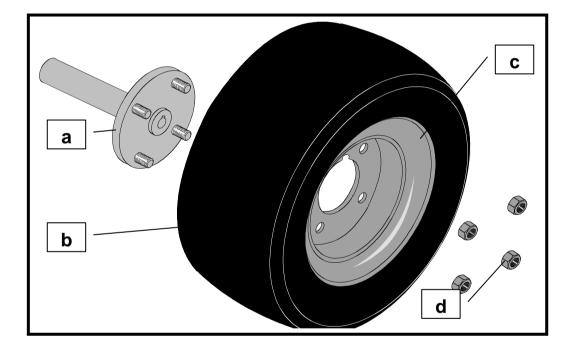


Item	Description	Pt. No.
а	Transaxle Hub	198001300
b	20" Rear Tyre	198001200
С	20" Wheel Rim	198001100
d	Wheel Nut	048000800


To accommodate this improvement the following changes have been made on all C' Series tractors after serial number 000201..... : -

## Cont'd Service Bulletin 00- T6. 10

- 1. The front wheel stub axles are now standard number (L/H Pt. No. 327008900- R/H 327009000) these were originally used on the C800HE 1999 build tractors.
- 2. All decks now incorporate a new front deck mounting bracket raised 20mm.

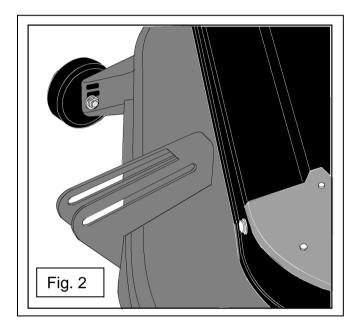

3. Both the front and rear deck-hanging brackets have been changed to accommodate the extra height.

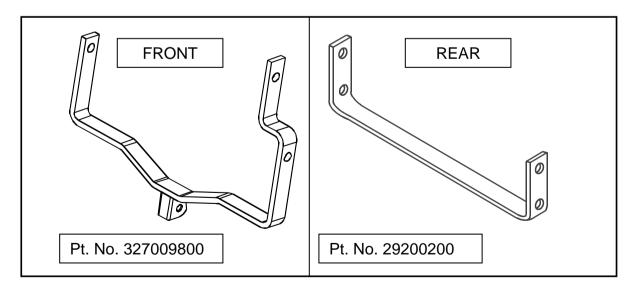

## Cont'd Service Bulletin 00- T6. 11

4. The deck height lever has been improved to make adjustments easier between deck changes. The maximum or minimum deck height can be set by simply adjusting the two lock nuts (e) and (f) to the appropriate height for Rear discharge, Mulching or Field mulching Decks.

